
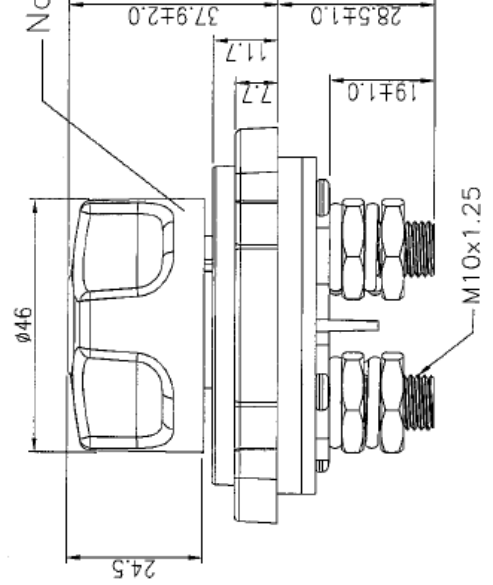
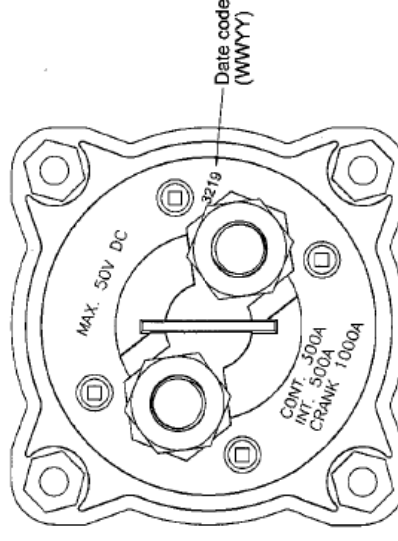
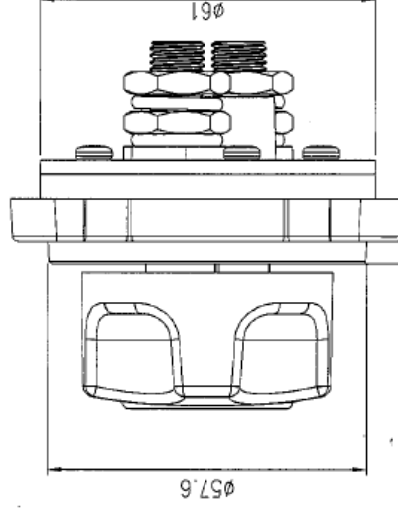


Continuous Rating	300 Amps 50VDC Max.	Mounting Hole		Actions Diagram		Circuit Diagram	
Intermittent Rating	500 Amps	A	B				
Cranking Rating	1000 Amps 30 sec.			OFF		Actuator out	
Contact Resistance	50m ohm Max.						
Insulation Resistance	DC 1000V 100M ohm Min.						
Dielectric Strength	DC 2000V 1 minute AC 1000V 1 minute						
Operation Temperature	-20°C~80°C						
Switch Function	ON/OFF/OUT						
Actuation Force	9±3 Kgf-cm						

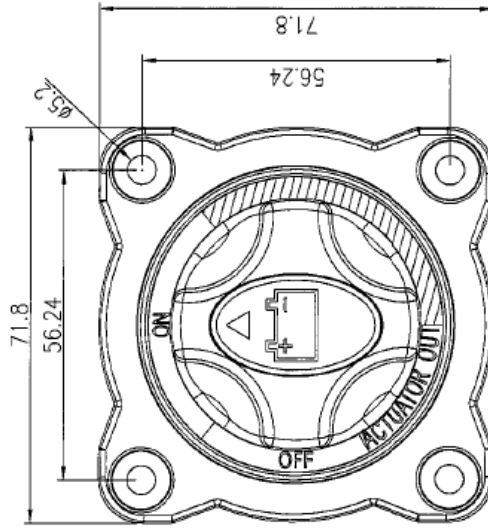


Note 2
Ingress Protection : IP68
(1.8M/30minutes)
Only for operating surface

Material :

Actuator,Housing,Cover : PBT(UL flame:94V-0)
Contact, Screw : copper alloy
Nut : nickel plated brass
Washer : SUS316

Note:

- 1.Tolerance is $\pm 0.5\text{mm}(0.02")$ unless other notice
- 2.Actuator could be taken out at Actuator Out position
- 3.Actuator Out to OFF position : Push and turn

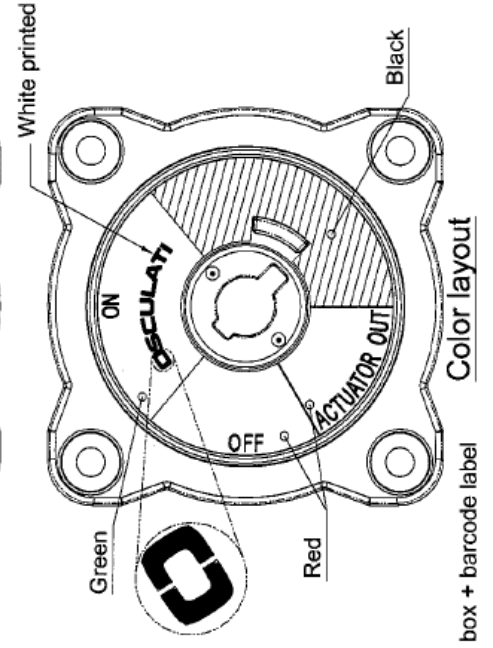

Color layout
For EO021 only
Osculati pack : white box + barcode label