


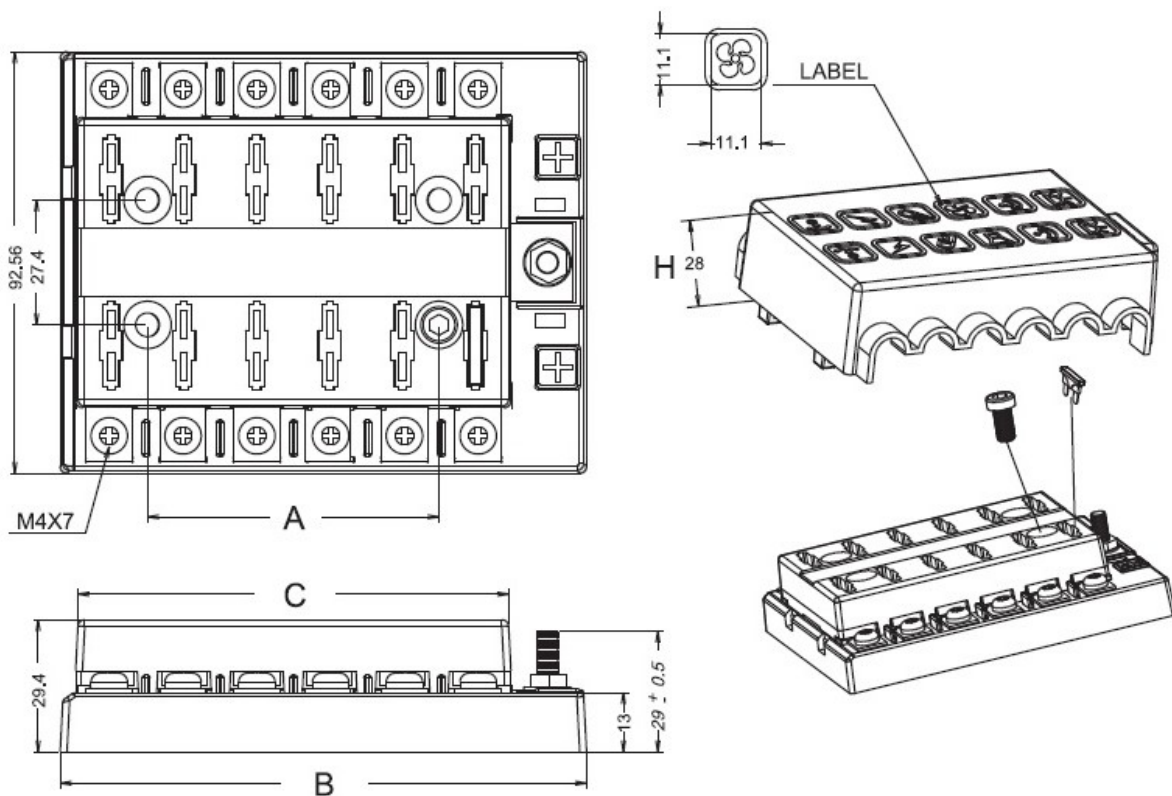

- For ATY-N (ATC or ATO) fuses
- M4X7 mm Screws Terminal
- #10-32 Stud terminal with hex, nut flax washer and lockwasher supplied
- Four 5.5mm diameter mounting holes for #10 screws
- Transparent cover for dust & humid protection. (Can choose with or without the cover).
- Rugged, lightweight construction

Specifications:

- Maximum Amperage per circuit-25Amps
- Maximum Voltage 32V DC
- Cover material-clear polycarbonate
- Maximum Amperage per block -100 Amps
- Base Material- Polycarbonate
- Terminal Material- Copper (Tin Plating)

Part No.	Part No.	Description:	A Dim.	B Dim.	C Dim.
With Cover	Without Cover		± 0.5	± 0.5	± 0.5
202-06KW	202-06W	6 Way fuseholder terminals with or without cover	16	66.85	46.60
202-08KW	202-08W	8 Way fuseholder terminals with or without cover	32	83.00	62.70
202-10KW	202-10W	10 Way fuseholder terminals with or without cover	48	99.45	78.70
202-12KW	202-12W	12 Way fuseholder terminals with or without cover	65	115.70	95.50